


THERMOSTAT TS/1

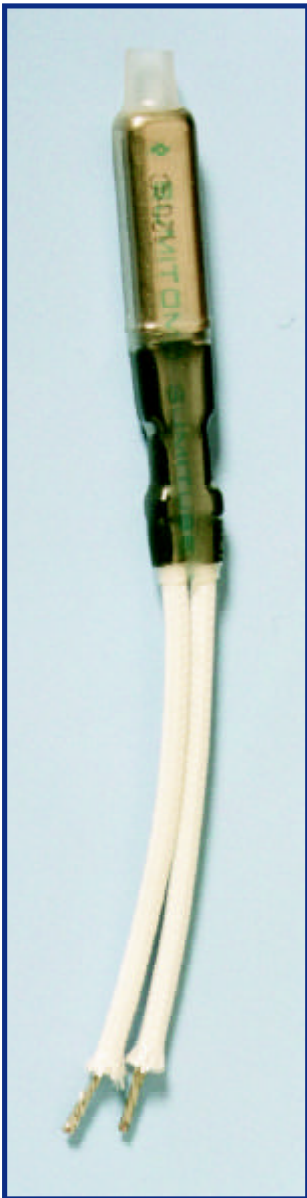

APPLICATIONS

Battery Pack, Small domestic appliances, Transformer, Lighting ballast.

FEATURES

RATED (Resistive Load)	24VDC 100mA.	50K+ cycles
	120VAC 10A.	10K+ cycles
	120VAC 6A.	30K+ cycles
	240VAC 6A.	10K+ cycles
TEMPERATURES	12 versions	
OPERATING TOLERANCE	Standard $\pm 5^{\circ}\text{C}$	
RESET DIFFERENTIAL	$10^{\circ} - 40^{\circ}$	
CONTACTS	Current carrying normally closed. Snap action, quick make / break	
INTERRUPT CAPACITY	120VAC - 60A. 5 cycles	
OVERSHOOT TEMP.	200°C / 3 mins.	
DIELECTRIC STRENGTH	1500VAC / min	
BALLAST RATED	for 10,000 cycles	
WEIGHT	5 grams (with wires)	


Supplied with 2 silicon wires and fully enclosed in a shrink sleeve (case is 'live').

ORDERING

Order by TS/1 (Temp rating).

P/No.	RATED TEMP °C	UL APPROVAL
FC 672701	45	●
FC 672702	60	●
FC 672703	70	●
FC 672704	80	●
FC 672705	85	●
FC 672706	90	●
FC 672707	95	●
FC 672708	100	●
FC 672709	110	●
FC 672710	120	●
FC 672711	130	●
FC 672712	140	●

UL File E 125871(S)

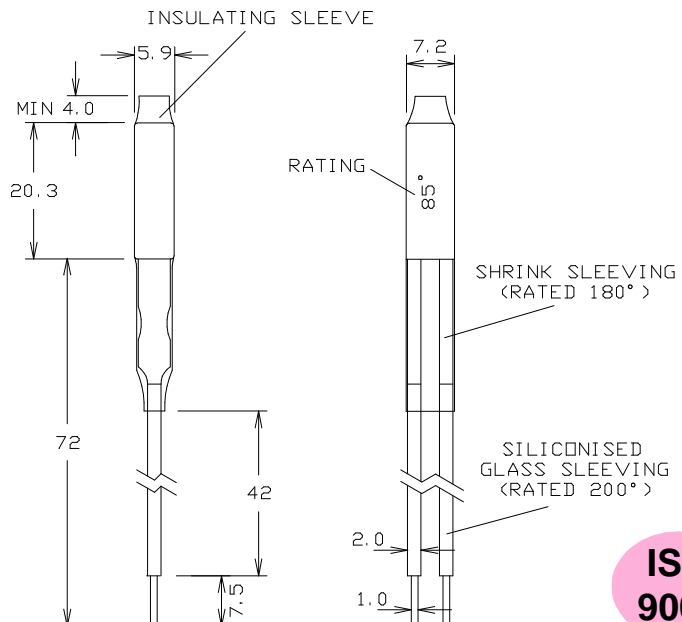

ISO
9002