





CET**CLIFF TAIWAN**

SPEAKER SPECIFICATION

sales@cliffuk.co.uk

No: 93112208 Model FC68171

1	MODEL	TMP-013CN (F13P27B)
2	Dimension	Outer Diameter 13.5 mm Baffle Opening 13.1 mm.
		Height Refer to drawing Weight 1.25 Gram.
3	Magnet	Materials Rare Earth Size $\phi 6.5 \times \phi 2.0 \times 1.6$ mm.
4	Nominal Impedance	8 Ohm $\pm 15\%$ At 1000 Hz
5	Power Rating	Normal 0.2 W. Maximum 0.4 W.
6	Lowest Resonant Frequency	740 \pm 148 Hz
7	Output Sound Pressure Level (S.P.L.)	100 \pm 3 db / 1 mW 1cM.
		Average at 1000,1200,1500,2000 HZ
8	Frequency Range	400~20K Hz. Average SPL-10 db.
9	Distortion	5 % Maximum At 1000 Hz 0.2 W.
10	Abnormal Sound Test	Must be Normally Tested By 1.26 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 1.26 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +50°C
13	Storage Temperature	-40°C ~ +60°C
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

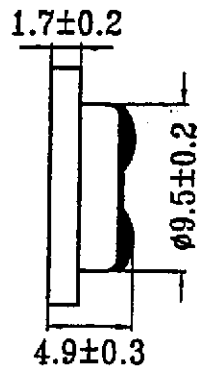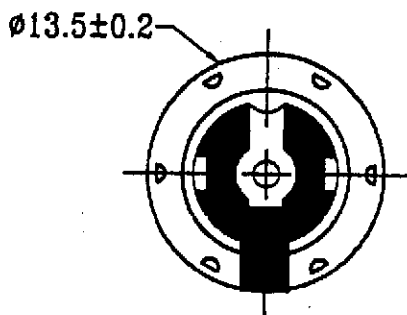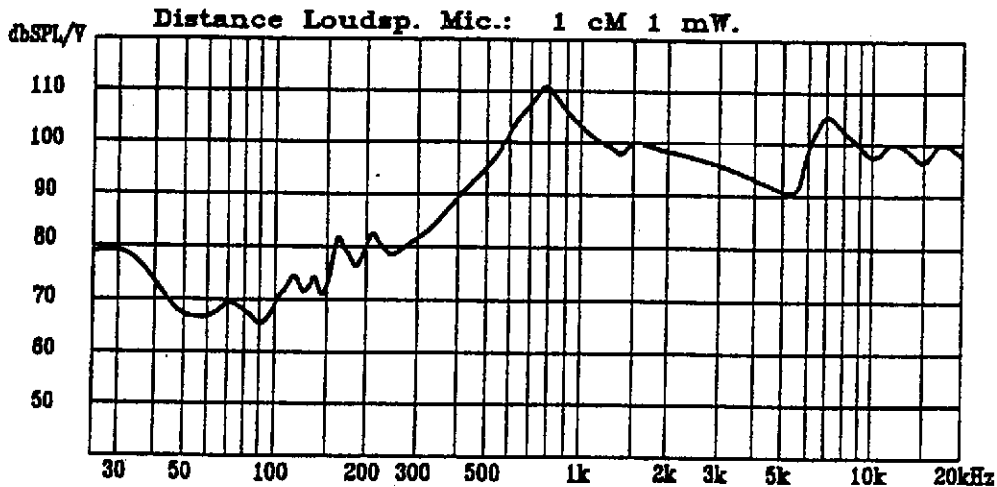

Unit:mm

0306B