

CET



CLIFF TAIWAN

SPEAKER SPECIFICATION

sales@cliffuk.co.uk

No: 93112201 Model FC68177

1	MODEL	TMP-028CN (F28P04B)
2	Dimension	Outer Diameter 28 mm Baffle Opening 28.3 mm.
		Height Refer to drawing Weight 2.6 Gram.
3	Magnet	Materials Rare Earth Size $\phi 9.5 \times 1.5$ mm.
4	Nominal Impedance	8 Ohm $\pm 15\%$ At 1000 Hz
5	Power Rating	Normal 0.1 W. Maximum 0.2 W.
6	Lowest Resonant Frequency	520 \pm 104 Hz
7	Output Sound Pressure Level (S.P.L.)	80 \pm 3 db / 1 Watt 1 Meter.
		Average at 600,800,1000,1200 HZ
8	Frequency Range	300~6000 Hz. Average SPL-10 db.
9	Distortion	5 % Maximum At 1000 Hz 0.1 W.
10	Abnormal Sound Test	Must be Normally Tested By 0.89 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 0.89 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +60°C 16 Hours.
13	Storage Temperature	-40°C ~ +70°C 2 Hours.
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

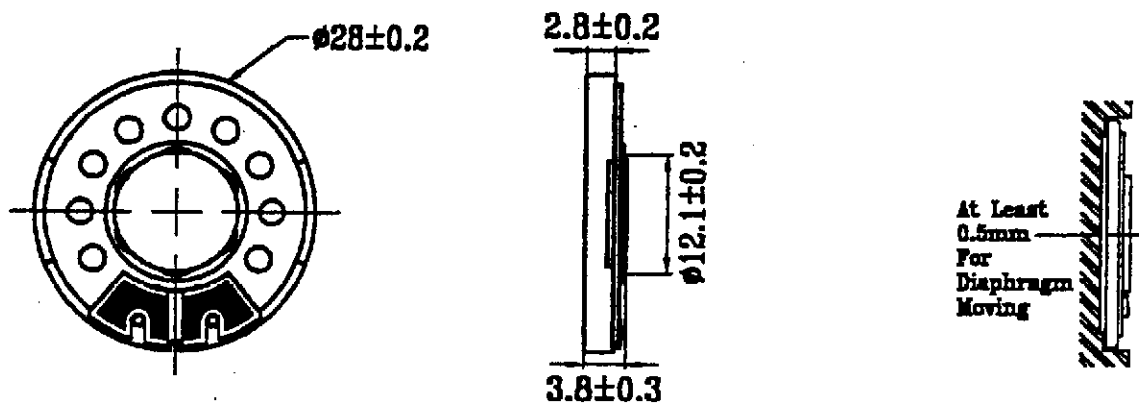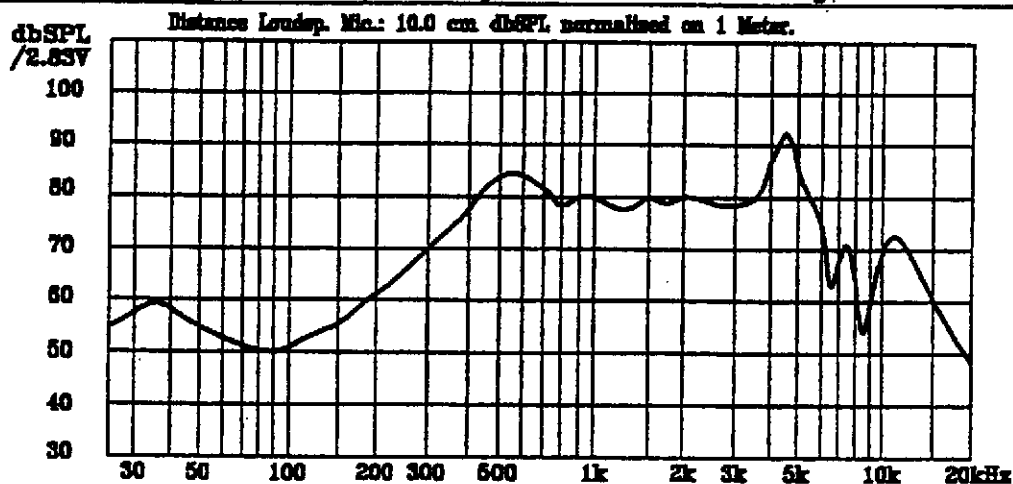

Unit:mm

0108C

We reserve the right to alter specification without notice for further improvement.