



CET**CLIFF TAIWAN**

sales@cliffuk.co.uk

SPEAKER SPECIFICATION

No: 93112203 Model FC68178

1	MODEL	TMP-028CN (F28P02B)
2	Dimension	Outer Diameter 28 mm Baffle Opening 26.3 mm.
		Height Refer to drawing Weight 2.8 Gram.
3	Magnet	Materials Rare Earth Size $\phi 9.5 \times 1.5$ mm.
4	Nominal Impedance	8 Ohm $\pm 15\%$ At 1000 Hz
5	Power Rating	Normal 0.2 W. Maximum 0.4 W.
6	Lowest Resonant Frequency	750 \pm 150 Hz
7	Output Sound Pressure Level (S.P.L.)	81 \pm 3 db / 1 Watt 1 Meter.
		Average at 800,1000,1200,1500 HZ
8	Frequency Range	500~7000 Hz. Average SPL-10 db.
9	Distortion	5 % Maximum At 1000 Hz 0.2 W.
10	Abnormal Sound Test	Must be Normally Tested By 1.28 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 1.28 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +60°C 16 Hours.
13	Storage Temperature	-40°C ~ +70°C 2 Hours.
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC
		Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

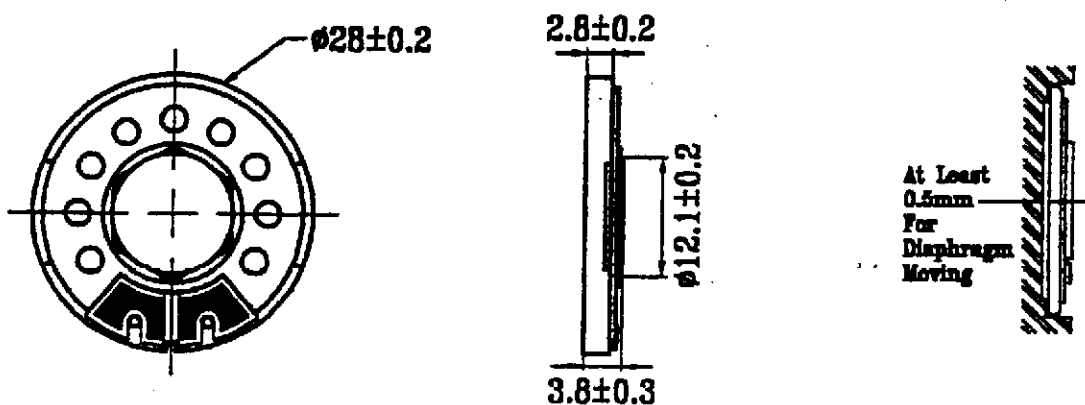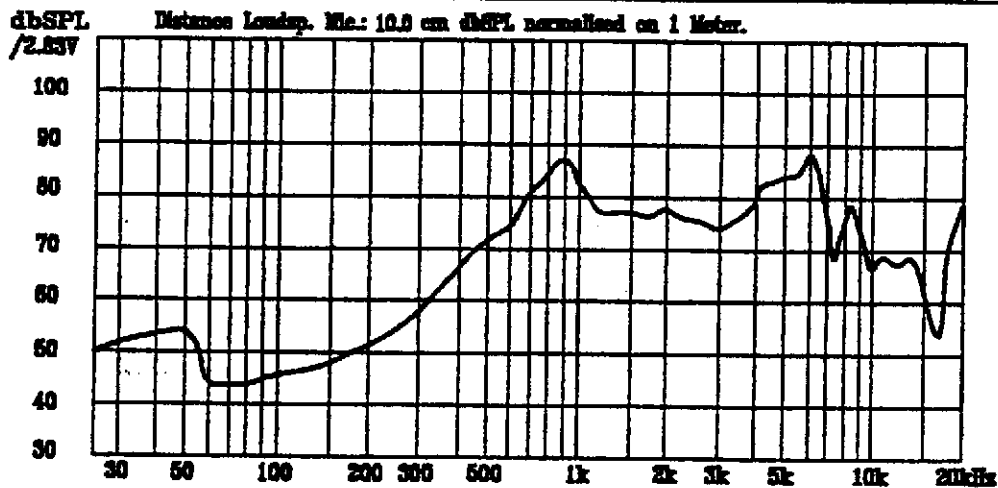

Unit:mm

0107A

We reserve the right to alter specification without notice for further improvement.