

CET



CLIFF TAIWAN

sales@cliffuk.co.uk

SPEAKER SPECIFICATION

No: 93112209 Model FC68182

1	MODEL	TMP-050CN (F50P01B)
2	Dimension	Outer Diameter 50 mm Baffle Opening 46.3 mm. Height Refer to drawing Weight 11.4 Gram.
3	Magnet	Materials Rare Earth Size $\phi 12.5 \times 1.5$ mm.
4	Nominal Impedance	8 Ohm $\pm 15\%$ At 1000 Hz
5	Power Rating	Normal 0.3 W. Maximum 0.6 W.
6	Lowest Resonant Frequency	330 \pm 66 Hz
7	Output Sound Pressure Level (S.P.L.)	88 \pm 3 db / 1 Watt 1 Meter. Average at 400,500,800,800 HZ
8	Frequency Range	180~4000 Hz. Average SPL-10 db.
9	Distortion	5 % Maximum At 1000 Hz 0.3 W.
10	Abnormal Sound Test	Must be Normally Tested By 1.55 Volts Sine Wave.
11	Load Test	White Noise with Weighted Filter 1.55 Volts. (RMS) 24 Hrs.
12	Operation Temperature	-25°C ~ +80°C 16 Hours.
13	Storage Temperature	-40°C ~ +70°C 2 Hours.
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC Current to the "+" or "Marked" Terminal.
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.

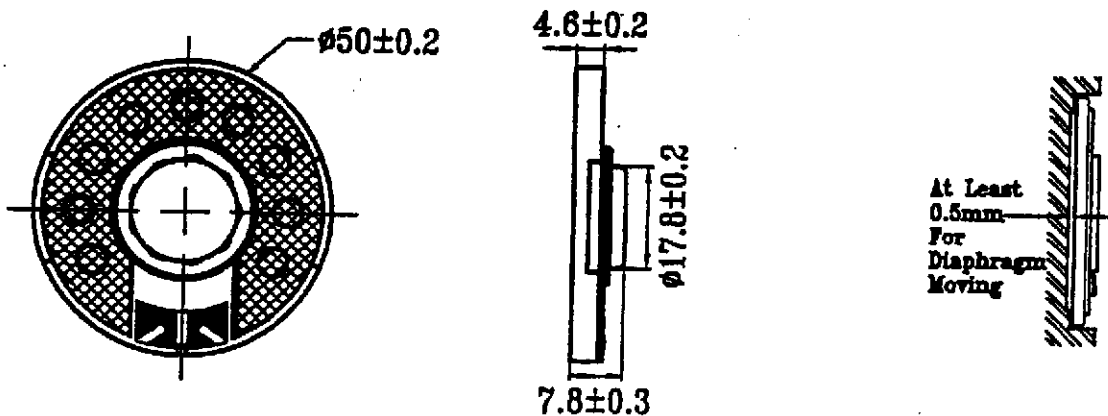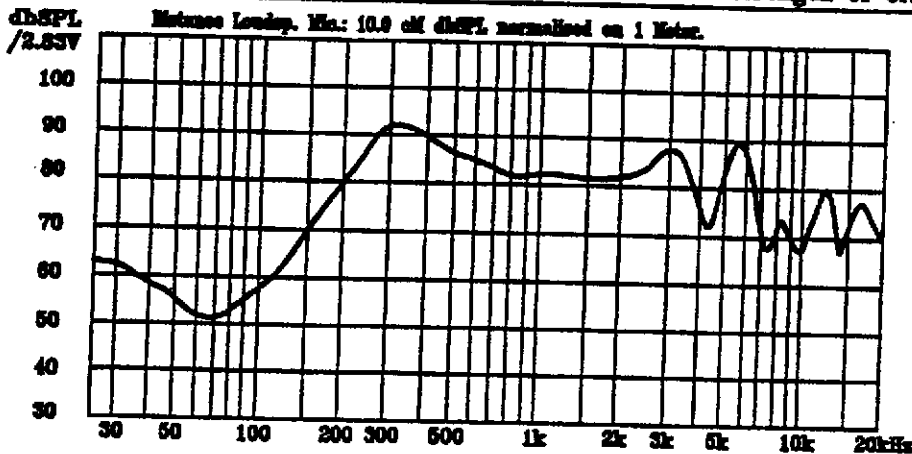

Unit:mm

0210A