

CLIFF

CIRCUIT PROTECTOR

A-0708 Series

APPLICATIONS: Power supply, Amplifier, UPS, Regulator, Generator.

Mounting options - With Nut (U Type), Snap in (W Type)



Reset button may be black or red.

SPECIFICATION

Rating	4 - 16 Amperes in 1A. steps (13 Models).
Input Power	32VDC / 120VAC / 240VAC
Dielectric strength	1500VAC / 1 min.
Interrupt capacity	@ 120VAC - 1000A., @ 240VAC - 200A.
Calibration	@ 25°C 105% of rated current - Continuous.. @ 25°C 196% to 134% of rated current - May / May not trip. @ 25°C 200% of rated current - Trip within 1 minute.

E.g. 4 amp model @ 25°C 150% of rated current - Trip within 60 mins.

Contact endurance @ 120VAC / 150% of rated current - 500 cycles.

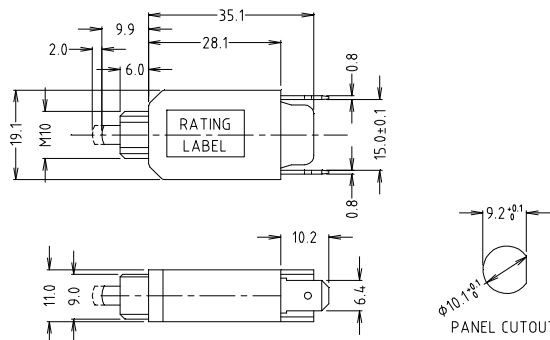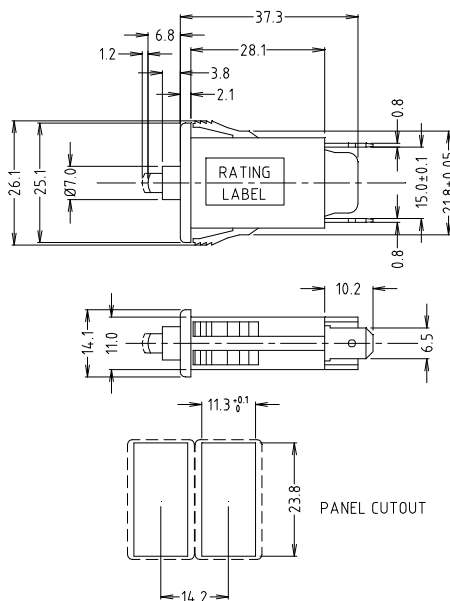


OPTION
NAMEPLATE
WASHER 'C'




HEX NUT
('A' TYPE)



ROUND NUT
('B' TYPE)



TRIP TIME CURVE

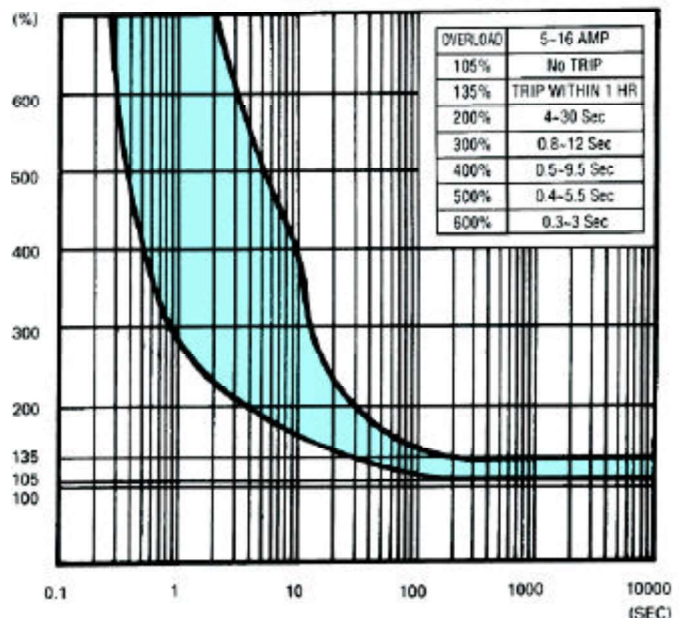

Max Internal Resistance	
4A-5A	0.120W
5A-6A	0.100W
6A-7A	0.075W
7A-8A	0.035W
8A-9A	0.020W
10A-13A	0.015W
14A-15A	0.010W
15A-16A	0.008W

Derating Factor		
TEMP.	4A.	5A-16A.
10°C	x1.45	x1.20
15°C	x1.20	x1.11
20°C	x1.10	x1.06
25°C	x1.00	x1.00
30°C	x0.80	x0.93
35°C	x0.65	x0.88
40°C	x0.50	x0.83
45°C	-	x0.77
50°C	-	x0.72
55°C	-	x0.65
60°C	-	x0.58



www.cliffuk.co.uk

VDE Pending