


# CLIFF

## DUAL USB2.0 A-A FEEDTHROUGH CONNECTOR

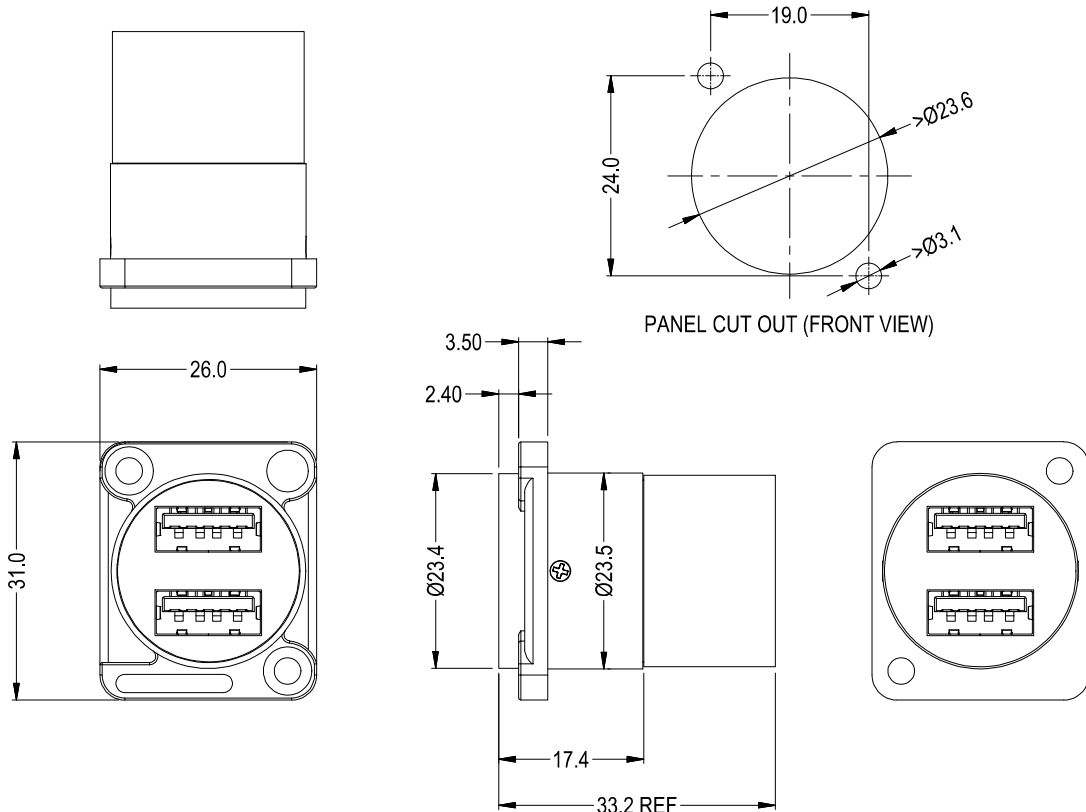

### Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

### General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

### VARIANTS

#### Part No.

- CP30085** Dual USB2.0 A-A Nickel plated metal frame, CSK holes  
**CP30086** Dual USB2.0 A-A Black metal frame, CSK holes

### Material:

1. USB Cover: PA6
2. Metal Frame: Diecast, Black or Nickel plated
3. Metal Frame: Diecast, Black or Nickel plated
4. USB Connector: Composite
5. PCB: FR4
6. Contacts: Gold Plated

### Notes:

- Contact Resistance:  $\leq 30\text{m}\Omega$   
Dielectric Strength: 500V AC  
Insulation Resistance : 1000M $\Omega$   
Operating Temperature: -25°C to +85°C  
Rated Current: 1.5A  
Rated Voltage: 30V  
Lifetime: >1500 mating cycles