


CLIFF

DUAL USB3.0 A-A FEEDTHROUGH CONNECTOR

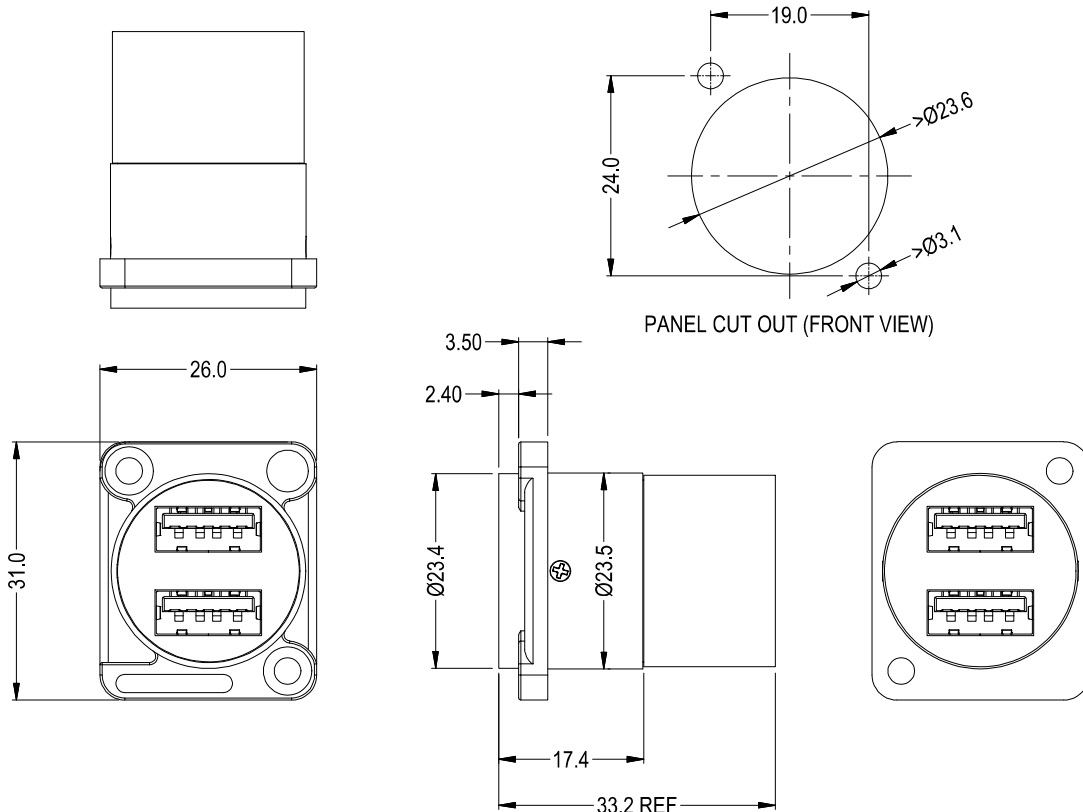

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

VARIANTS

Part No.

- CP30087** Dual USB3.0 A-A Nickel plated metal frame, CSK holes
CP30088 Dual USB3.0 A-A Black metal frame, CSK holes

Material:

1. USB Cover: PA6
2. Metal Frame: Diecast, Black or Nickel plated
3. Metal Frame: Diecast, Black or Nickel plated
4. USB Connector: Composite
5. PCB: FR4
6. Contacts: Gold Plated

Notes:

- Contact Resistance: $\leq 30\text{m}\Omega$
Dielectric Strength: 500V AC
Insulation Resistance : 1000M Ω
Operating Temperature: -25°C to +85°C
Rated Current: 1.5A
Rated Voltage: 30V
Lifetime: >1500 mating cycles