

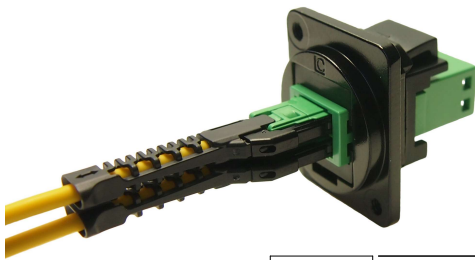
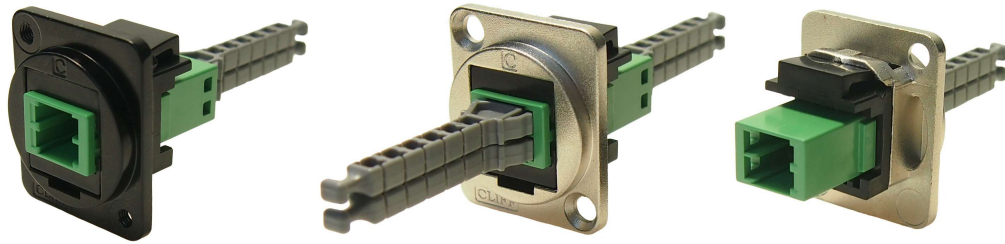

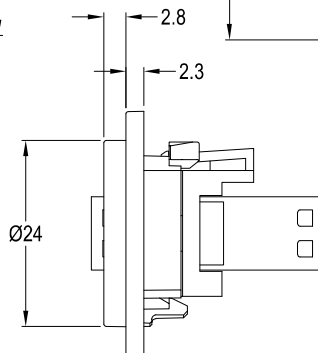
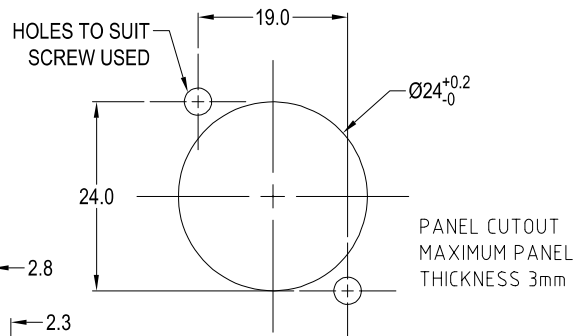


CLIFF

2 PORT MMC FEEDTHROUGH ADAPTOR

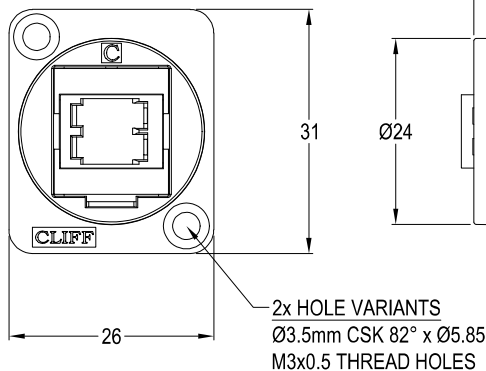

MMC is a Very Small Form Factor (VSFF) multi-fibre optical connector designed for termination of multiple single-mode and multimode fibre cables in the AI Data Centre environment. This 2 port MMC Feedthrough Adaptor will accept one or two US CONEC APC polish connectors and is supplied with two single port dust covers on the front and rear (four in total).

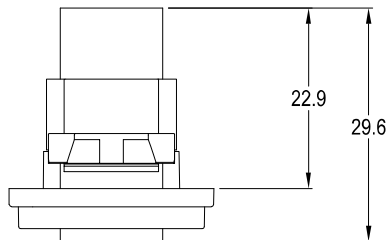

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

VARIANTS

Part No.

CP30244M	MMC Adaptor Nickel plated metal frame, CSK holes
CP30244MB	MMC Adaptor Black metal frame, CSK holes
CP30244M3	MMC Adaptor Nickel plated metal frame, M3 holes
CP30244M3B	MMC Adaptor Black metal frame, M3 holes

Material:

1. MMC Body: PEI UL94-V0 Green
2. Dust Caps: PC UL94-V0 Grey
3. Inner frame: ABS/PC Black UL94-V0
4. Frame: Zinc diecast, Nickel or Black plated

Specification

1. Operating temperature: -30°C to +80°C