


CLIFF

DUALSLIM USB-C F-M RIGHT ANGLE FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel

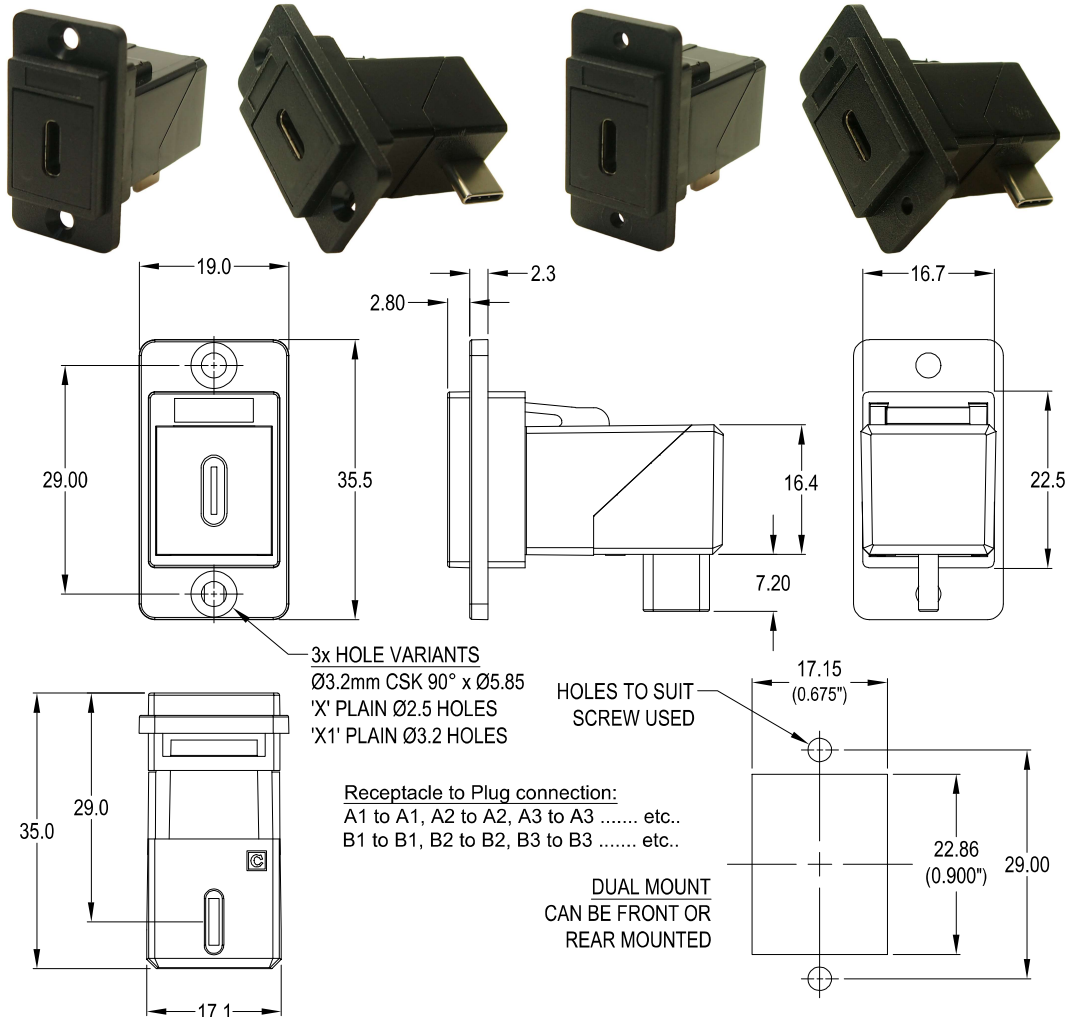

VARIANTS

Part No.

- CP30756** RAFT DUALSLIM USB-C F-M Black plastic frame, CSK holes
CP30756X RAFT DUALSLIM USB-C F-M Black plastic frame, Ø2.5 PLAIN holes
CP30756X1 RAFT DUALSLIM USB-C F-M Black plastic frame, Ø3.2 PLAIN holes

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.
- 90° or right angle rear cable entry.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Materials:

Frame: PA66, UL94 V-2

RAFT Insert: ABS, UL94 HB

USBC Insulator: LCP, UL94 V-0

USB-C (3.1) Specification:

Maximum Rated Current - 3A

Maximum Working Voltage - 30V

Dielectric Withstanding Voltage - 100VAC (min) 1 minute

Contact Resistance - 40mΩ maximum

Insulation Resistance - 100 MΩ minimum @100V DC

Insertion Life - 10,000 Cycles

Power Delivery (PD) Compatible - Yes