



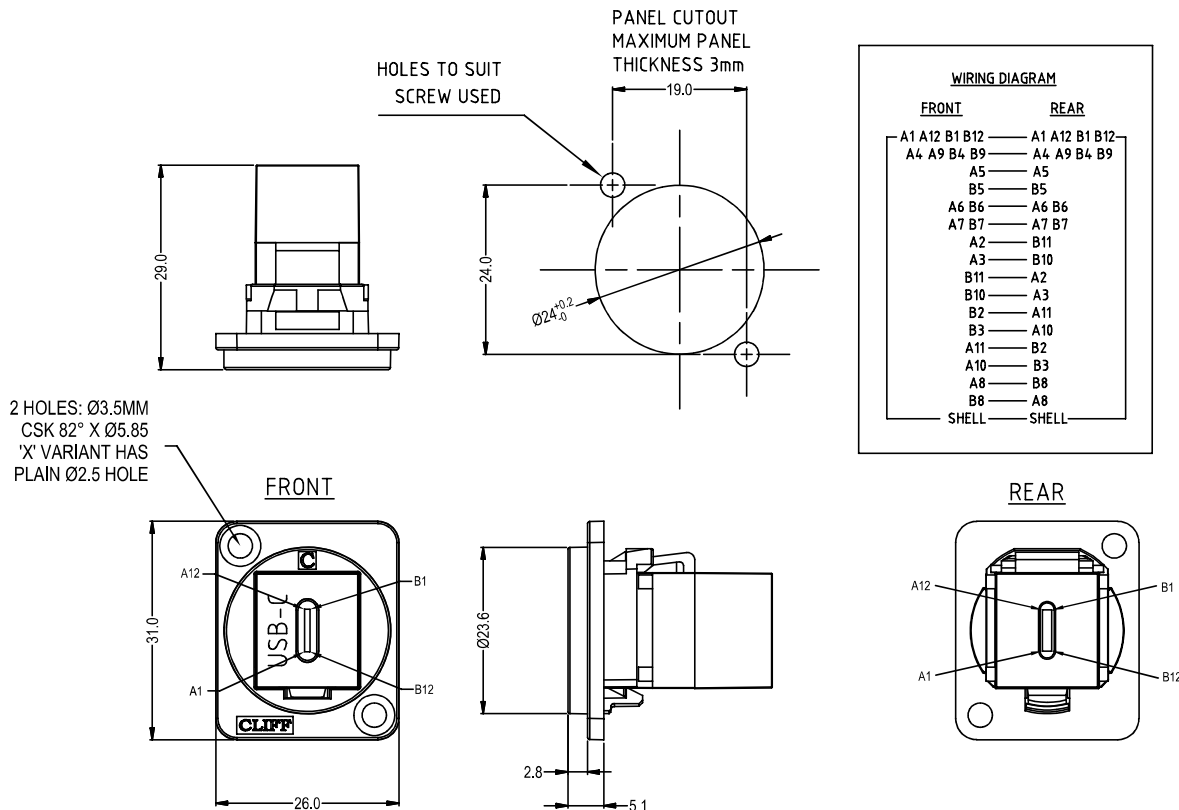

# FEEDTHROUGH CONNECTOR USB-C FEMALE - FEMALE

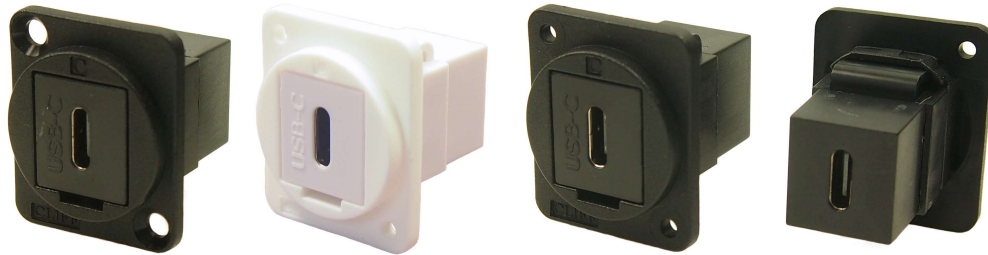

**N.B.**  
**FUNCTIONALITY IS AFFECTED BY CABLE QUALITY, LENGTH AND CABLE WIRING CONFIGURATION.**  
**NOT COMPATIBLE FOR POWER DELIVERY (PD) CHARGING.**

### Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

### VARIANTS

#### Part No.

- |                  |   |
|------------------|---|
| <b>CP30201</b>   | USB-C Female - Female, Black plastic frame, CSK holes   |
| <b>CP30201W</b>  | USB-C Female - Female, White plastic frame, CSK holes   |
| <b>CP30201X</b>  | USB-C Female - Female, Black plastic frame, Plain holes |
| <b>CP30201XW</b> | USB-C Female - Female, White plastic frame, Plain holes |

### USB-C Specification:

- Maximum Rated Current - 3A
- Maximum Power - 60W
- Withstanding Voltage - 100V for 1 minute.
- Contact Resistance - 40 Milli-ohms Max.
- Insulation Resistance - 100 Mega-ohms Min.
- Insertion Life - 5,000 Cycles.

### Materials:

- Frame: PA66, UL94-V2
- Insert: ABS - UL94 HB

