
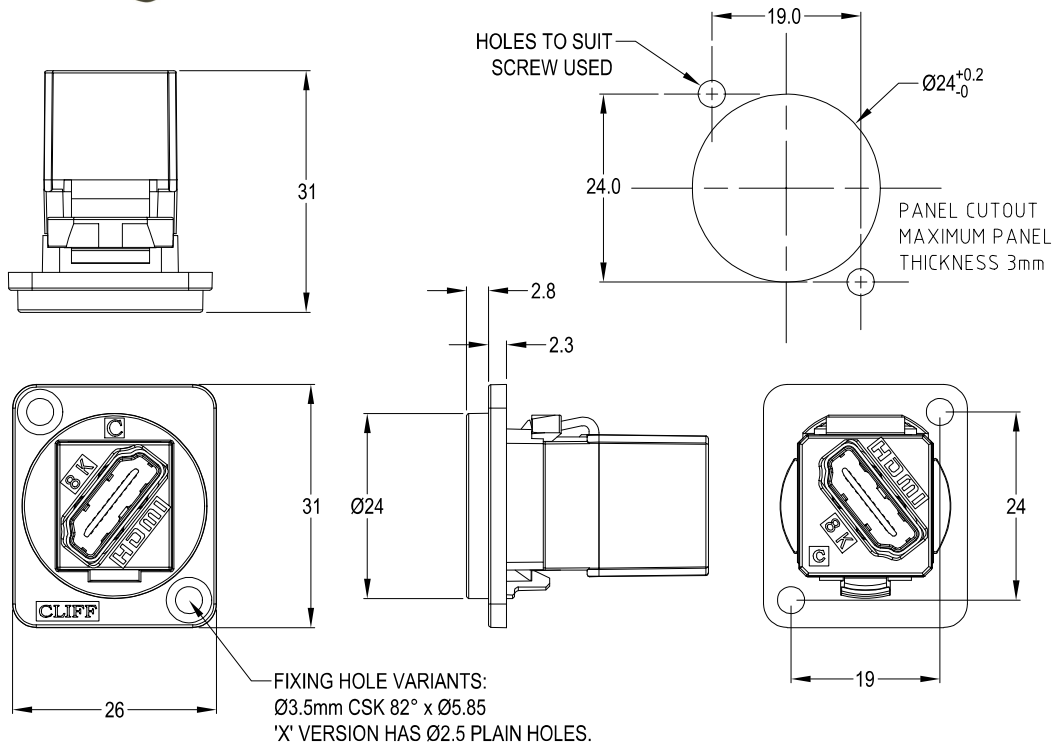


CLIFF

8K HDMI FEMALE - FEMALE FEEDTHROUGH CONNECTOR

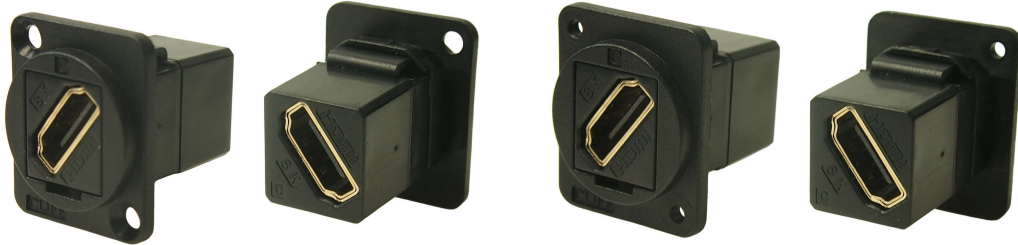

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Other models available:

Part No.

- CP30288** 8K HDMI F-F Black plastic frame, CSK holes
CP30288X 8K HDMI F-F Black plastic frame, Ø2.5 PLAIN holes

Material:

1. Insert: ABS UL94 HB
2. Frame: Polyamide UL94 V2
3. Shell: Gold plated
4. Contacts: Gold Plated

Specification:

1. Shielded HDMI 2.1 F-F
2. Voltage Rating: 40V ac
3. Current Rating: 0.5A max
4. Contact Resistance: 10mΩ max
5. Insulation Resistance: 100MΩ min
6. Dielectric Withstanding Voltage: 500V AC
7. Operating Temperature: -25°C to +85°C

HDMI Specification

1. Version: Shielded HDMI 2.1
2. Supported Video resolution: 7680 x 4320 60Hz
3. HDR Support : Yes
4. HDCP Specification: 1.4; 2.2
5. Chroma Sub Sampling: 4:4:4