

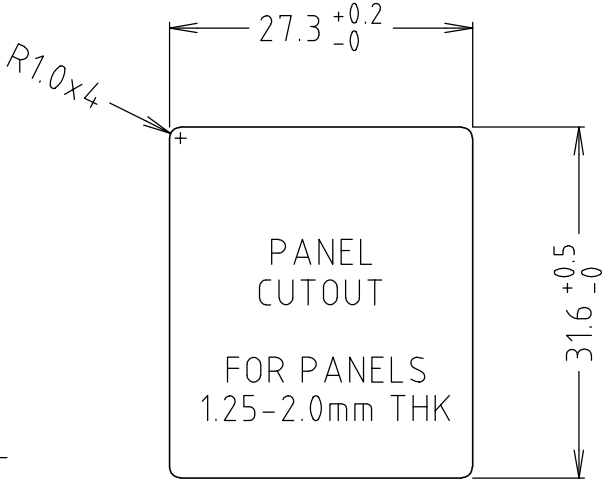
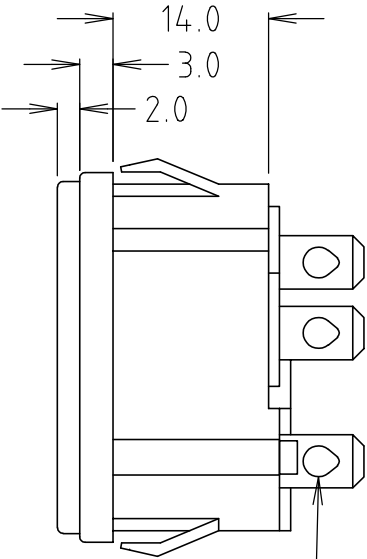
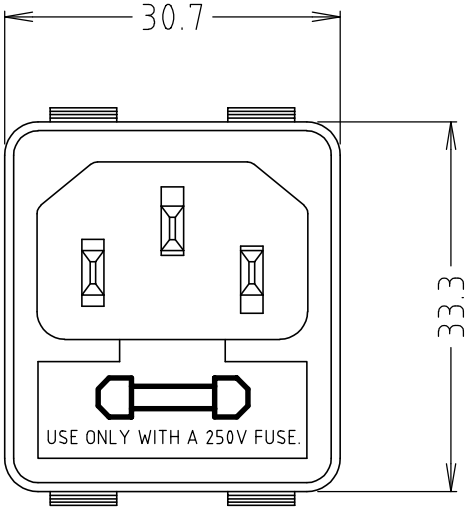


ISS.	AMEND	DATE
1	1st DRAWN	31/05/01
2	TAGS LABELLED	01/02/05
3	UPDATED	27/10/23

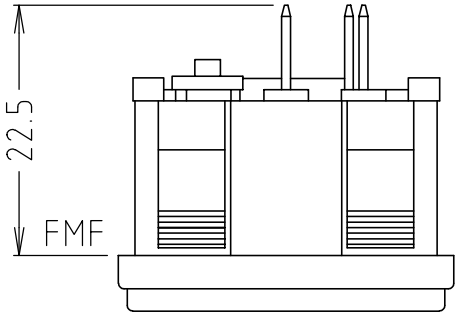

NOTE:
FOR PANEL THICKNESS
0.8-1.25mm, REDUCE 31.6mm
DIM TO 31.4mm

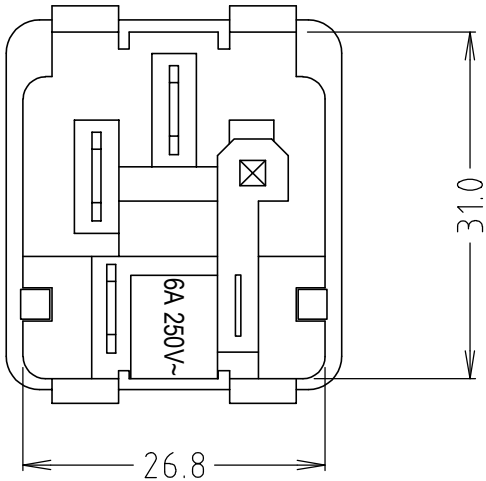

4.8mm x 0.8 FASTONS 3x

SPECIFICATION

INSULATION RESISTANCE : 100MΩ MIN.
DIELECTRIC STRENGTH : 2000V MIN.
RATING : 6A. 250V AC.
FUSEHOLDER FOR 5x20mm FUSE + SPARE FUSE.

UL APPROVAL E242265

RoHS
COMPLIANT

TOLERANCE
NO DEC. PLACE ± 0.50
1 DEC. PLACE ± 0.20
2 DEC. PLACE ± 0.10
HOLE Ø ± 0.10
ANGLES ± 1/2°
UNLESS
OTHERWISE STATED

Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 2001

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

MATERIAL: POLYAMIDE UL94V-0 / BRASS

FINISH: AS MOULDED / TIN PLATED

DRAWN: C.A.M.J.

APPROVED: R.W.T.

ANGLE PROJECTION:

DO NOT SCALE

TITLE: MAINS INLET FUSED SNAP-IN MS3X/R3014

DRWG. No. FC681378

FORM: A4DRWGH