



ISS.	AMEND	DATE
1	ISSUED	24/06/16

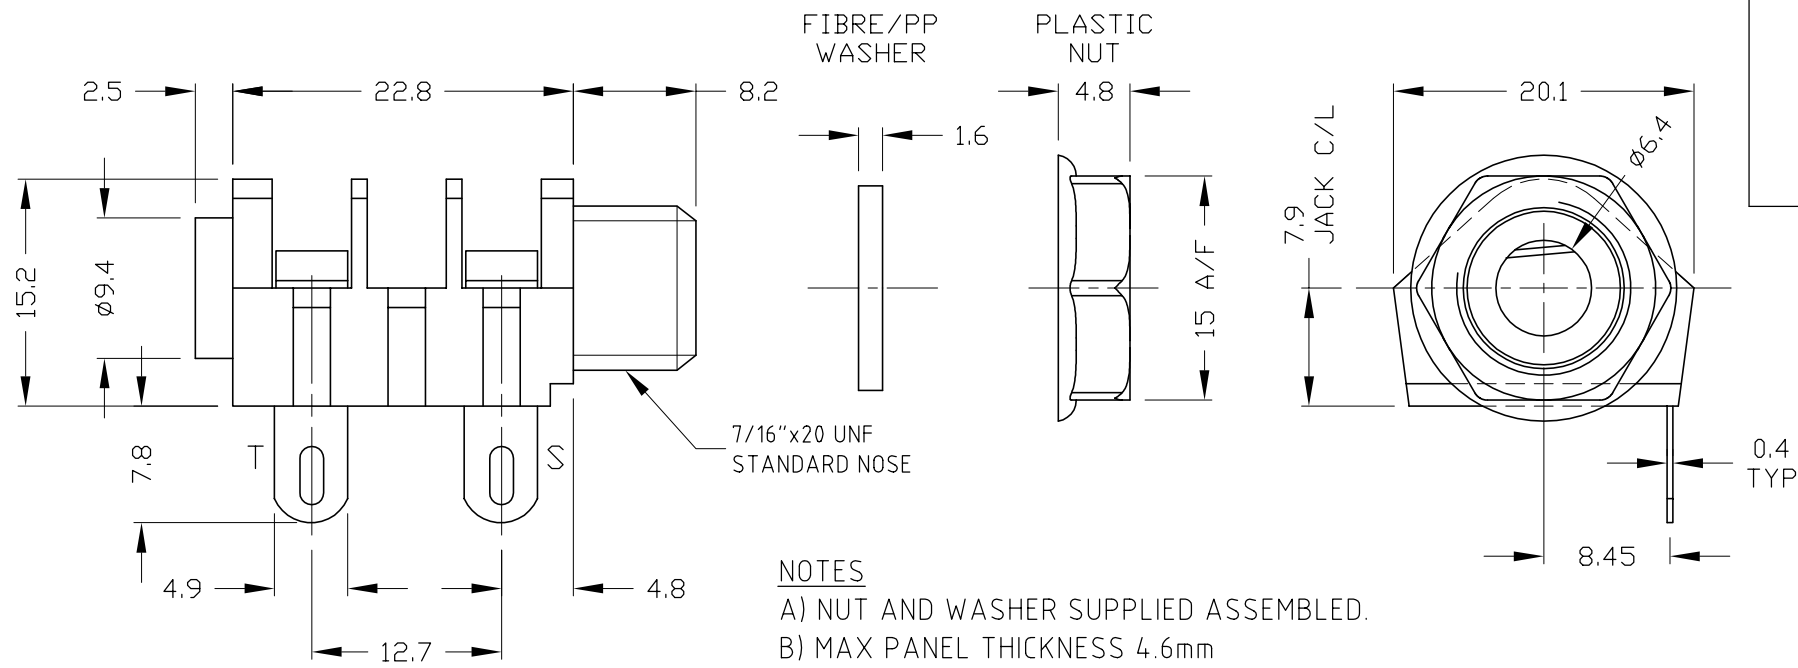

SPECIFICATION

Withstand voltage: 2000V DC Min.
 Maximum Current: 5A
 Temperature Rating: -10° C to +70° C
 Life (Minimum): 10,000+ Operations
 Nominal Contact Resistance: <50mΩ

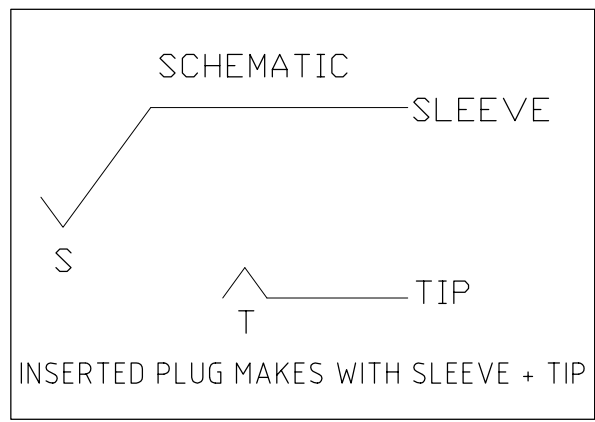

RoHS
COMPLIANT

TOLERANCE

NO DEC. PLACE ±
 1 DEC. PLACE ±
 2 DEC. PLACE ±
 HOLE Ø ±
 ANGLES ±
 UNLESS OTHERWISE STATED

DO NOT SCALE

Cliff Electronic Components Ltd. 76 Holmehorpe Avenue, Holmehorpe Industrial Estate, Redhill, Surrey, RH1 2PF, England, UK Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk	DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.		3rd ANGLE PROJECTION:	
	MATERIAL: NYLON / NiAg / FIBRE / PP		TITLE: S2/SNS SOLDER TAG - ASSEMBLED	
FINISH: AS MOULDED - BLACK / MICROFINISH		DRWG. No. CL1130A		FORM: A4DRWGH
DRAWN: T.J.O.		APPROVED: D.P.J.		

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 1991