
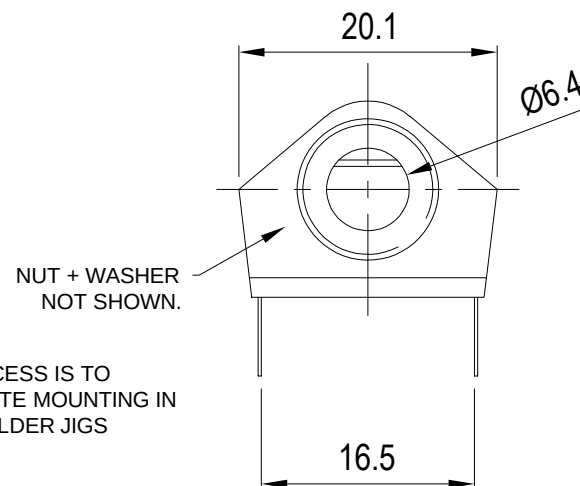


SWITCH CONTACTS OPEN
WHEN PLUG IS INSERTED,
CLOSE WHEN PLUG IS
WITHDRAWN.

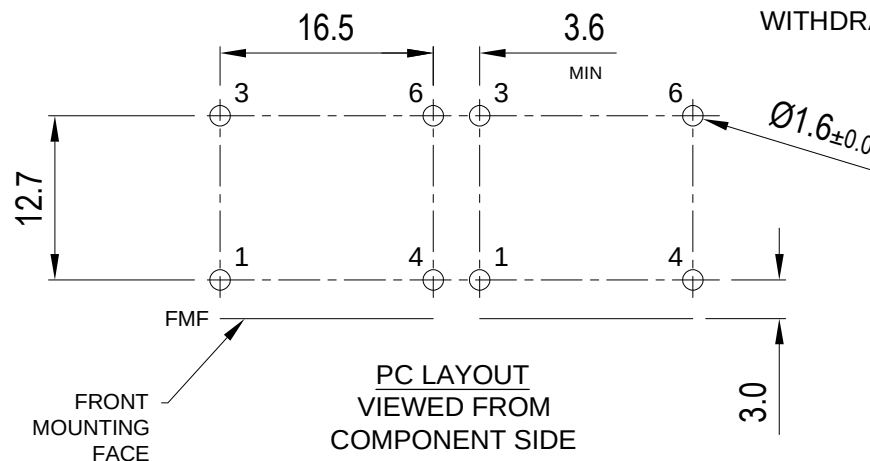

1. Maximum panel thickness 4.6mm.
2. Supplied with nut + fibre washer assembled.

Withstand voltage:	2000V DC Min.
Maximum Current:	5 amps
Temperature Rating:	-10° C to +70° C
Life (Minimum):	10,000+ Operations
Nominal Contact Resistance:	<50mΩ

RoHS
✓ COMPLIANT

TOLERANCE

NO DEC. PLACE ±
1 DEC. PLACE ±
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS
OTHERWISE STATED

1st DRAWN: 11/01/1991

DO NOT SCALE

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION:

TITLE: S2/BNB/PCA JACK SOCKET - ASSEMBLED

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 1991

MATERIAL:	NYLON / NiAg / FIBRE
FINISH:	AS MOULDED / MICROFINISH

DRAWN: TJO

APPROVED: DPJ

DRWG. No. CL1174A

FORM: A4DRWGH