


SPECIFICATION

Withstand voltage: 2000V DC Min.

Maximum Current: 5 amps

Temperature Rating: -10° C to +70° C Life (Minimum): 10,000+ Operations

Nominal Contact Resistance: <50mQ

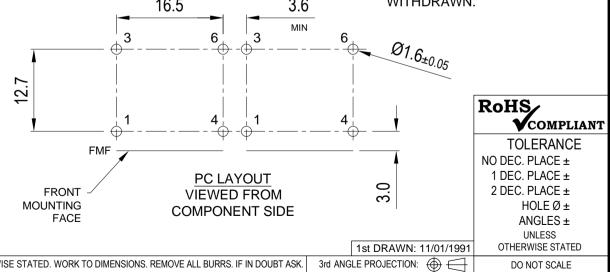

Cliff Electronic Components Ltd.
76 Holmethorpe Avenue, Holmethorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. (C)

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

NYLON / NiAg / FIBRE MATERIAL: AS MOULDED / MICROFINISH FINISH: TJO DRAWN: APPROVED: DPJ TITLE: S2/BNB/PCA JACK SOCKET - UNASSEMBLED

CL1174U DRWG. No.

FORM: A4DRWGH