


CLIFF

1/4" WHITE JACK SOCKET

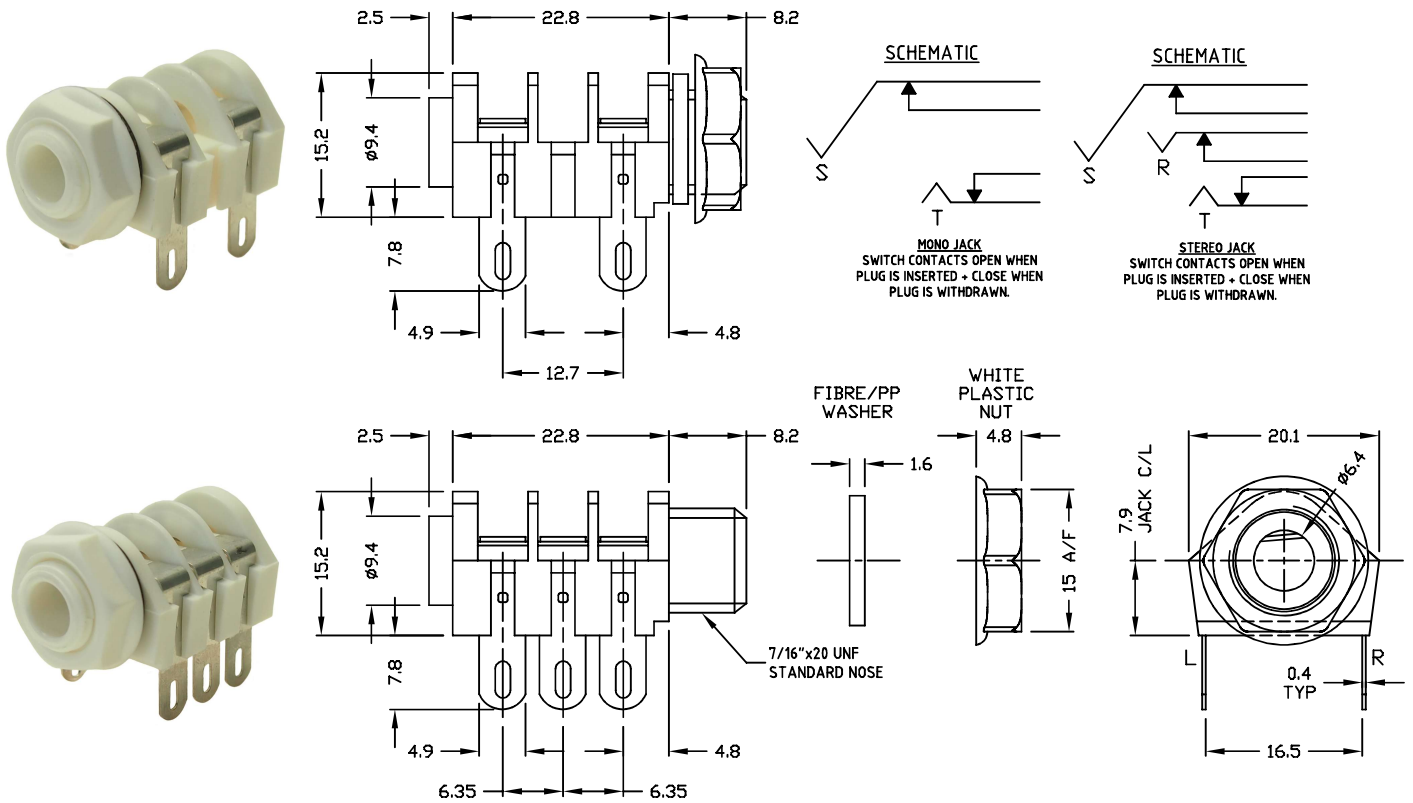

Part Nos:

CL1222A - 1/4" Stereo Jack Socket S2/BBB Solder Tag White Assembled

CL1223A - 1/4" Mono Jack Socket S2/BNB Solder Tag White Assembled

Jack Socket Specification

Withstand voltage: 2000V DC minimum.

Maximum current: 5 amps.

Temperature rating: -10°C to +70°C.

Life: Minimum 10,000+ operations.

Nominal contact resistance: < 50mΩ.

Max panel thickness 4.6mm