
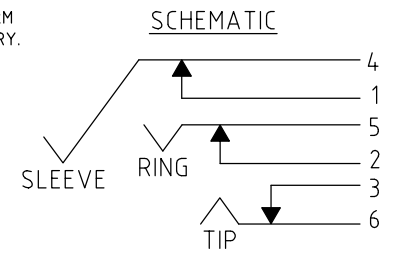


ISS.	AMEND	DATE
1	1st DRAWN	28/04/94
2	PC A/S REDRAWN	13/04/95
3	SEE MOD 0214	09/08/96
4	SEE MOD 0221	14/03/97
5	22.0 WAS 22.8	16/09/97
6	WASHER MATERIAL	29/06/01
7	22.3 WAS 22.0+UPDATED	08/02/16
8	VARIANTS REMOVED	12/08/24

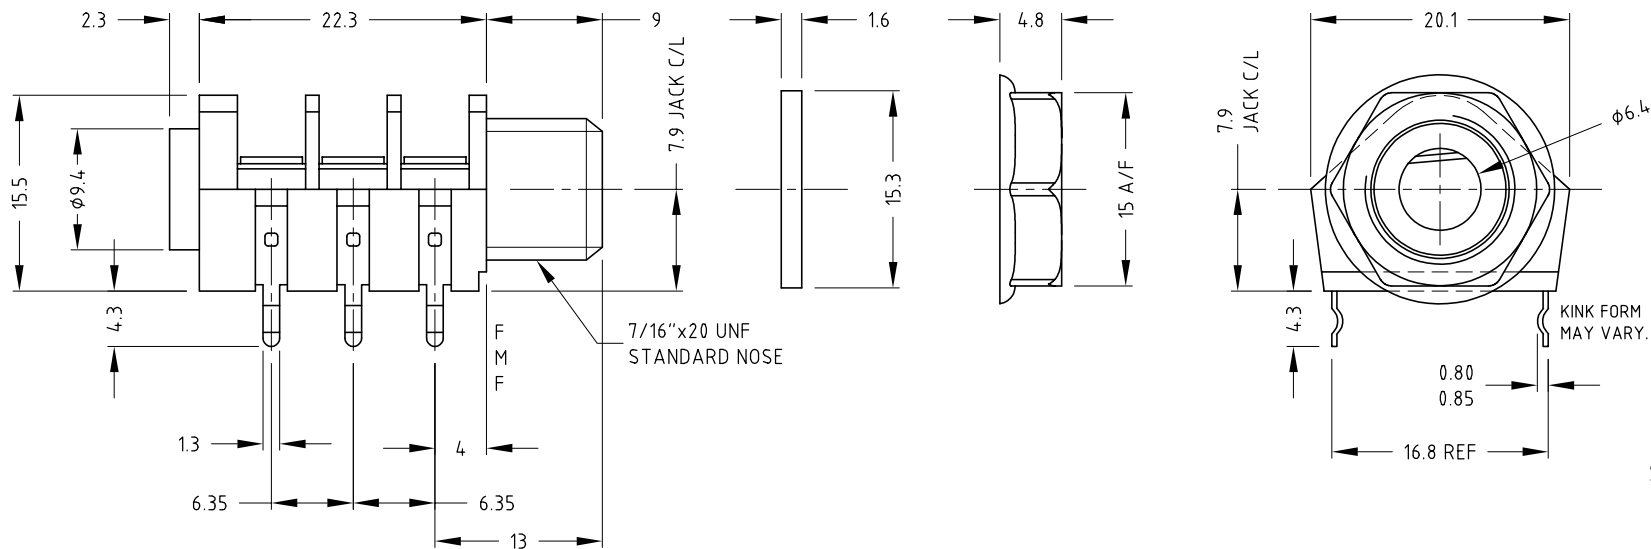


SPECIFICATION

Withstand voltage:	2000V DC Min.
Maximum Current:	5A
Temperature Rating:	-10° C to +70° C
Life (Minimum):	10,000+ Operations
Nominal Contact Resistance:	<50m Ω

NOTES

- Nut and washer supplied unassembled
- Max panel thickness 4.6mm

PCB LAYOUT

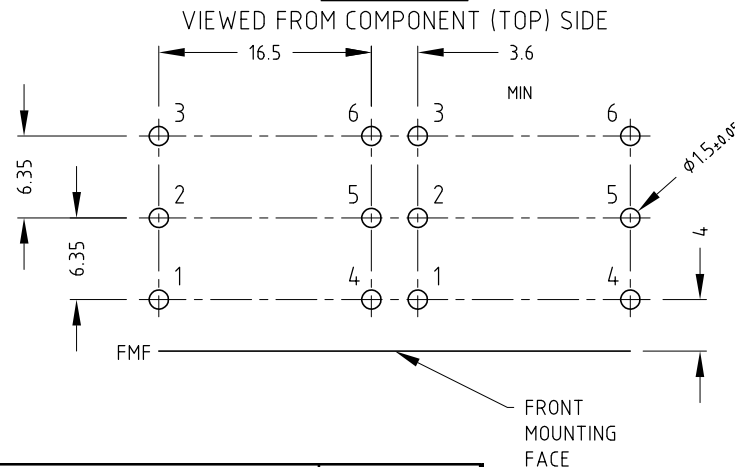

STEREO (BBB) JACK
 SWITCH CONTACTS OPEN WHEN
 PLUG IS INSERTED + CLOSE
 WHEN PLUG IS WITHDRAWN.

DESCRIPTION	MATERIAL	FINISH
BODY	PA66 V2	BLACK
CONTACTS	Ni Ag	TIN / GOLD
NUT	PA66 V2	BLACK
WASHER	FIBRE	BLACK

PART No.	DESCRIPTION	FINISH
CL1227	S2A/BBB/PCC KINKED	TIN
CL1227G	S2A/BBB/PCC KINKED	GOLD

RoHS COMPLIANT
TOLERANCE
NO DEC. PLACE \pm
1 DEC. PLACE \pm
2 DEC. PLACE \pm
HOLE ϕ \pm
ANGLES \pm
UNLESS OTHERWISE STATED
DO NOT SCALE

Cliff Electronic Components Ltd.

76 Holmehorpe Avenue, Holmehorpe Industrial Estate,
 Redhill, Surrey, RH1 2PF, England, UK
 Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION:

MATERIAL: SEE TABLE
FINISH: SEE TABLE
DRAWN: C.A.M.J.

TITLE: S2A/BBB/PC-C KINK	FORM: A4DRWGH
DRWG. No. CL1227	
APPROVED: R.W.T.	