


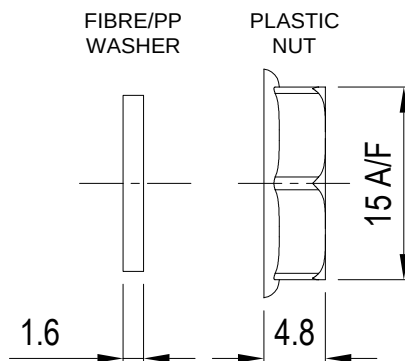


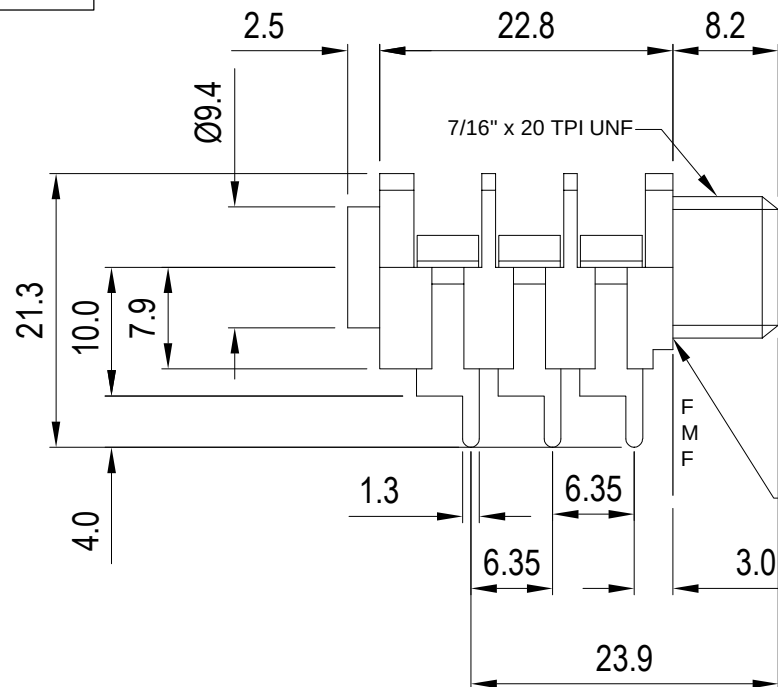

THIS RECESS IS TO FACILITATE MOUNTING IN FLOWSOLDER JIGS

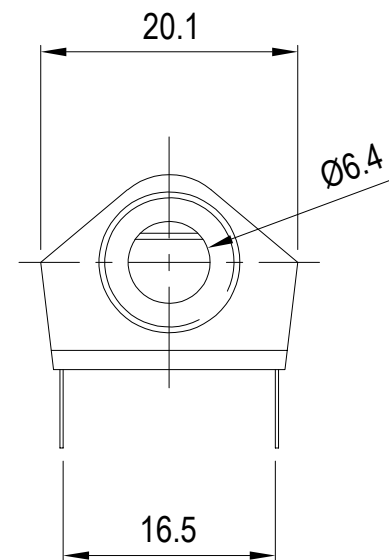

SCHEMATIC

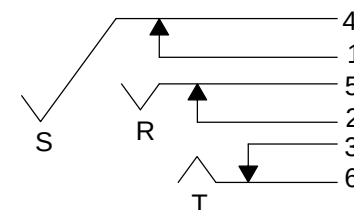


SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED, CLOSE WHEN PLUG IS WITHDRAWN.

NOTES

- Maximum panel thickness 4.6mm.
- Supplied with nut + fibre washer bulk packed unassembled.

SPECIFICATION

Withstand voltage:	2000V DC Min.
Maximum Current:	5 amps
Temperature Rating:	-10° C to +70° C
Life (Minimum):	10,000+ Operations
Nominal Contact Resistance:	<50mΩ

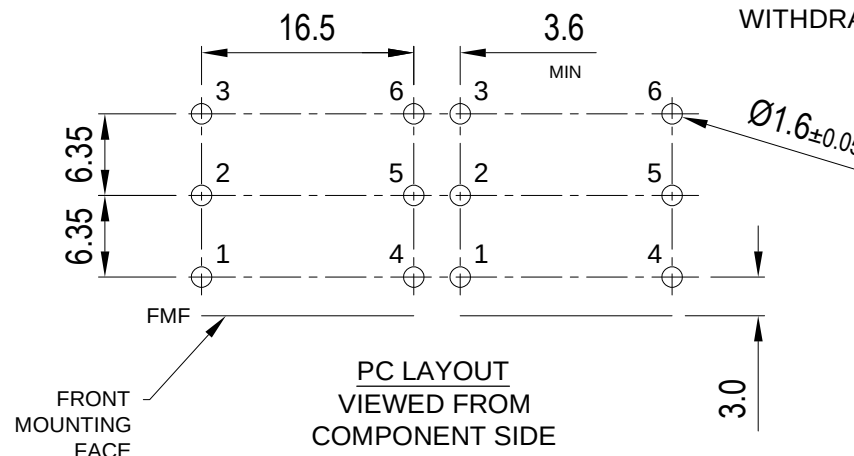

RoHS
COMPLIANT

TOLERANCE
NO DEC. PLACE ±
1 DEC. PLACE ±
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS OTHERWISE STATED

1st DRAWN: 11/01/1991

Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

MATERIAL: NYLON / NiAg / FIBRE

FINISH: AS MOULDED / MICROFINISH

DRAWN: NJB

APPROVED: RWT

3rd ANGLE PROJECTION:

TITLE: S2/BBB/PCA JACK SOCKET - UNASSEMBLED

DRWG. No. CL1232U

FORM: A4DRWGH

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 1991