


# CLIFF

## 1/4" JACK SOCKET S4/SNS

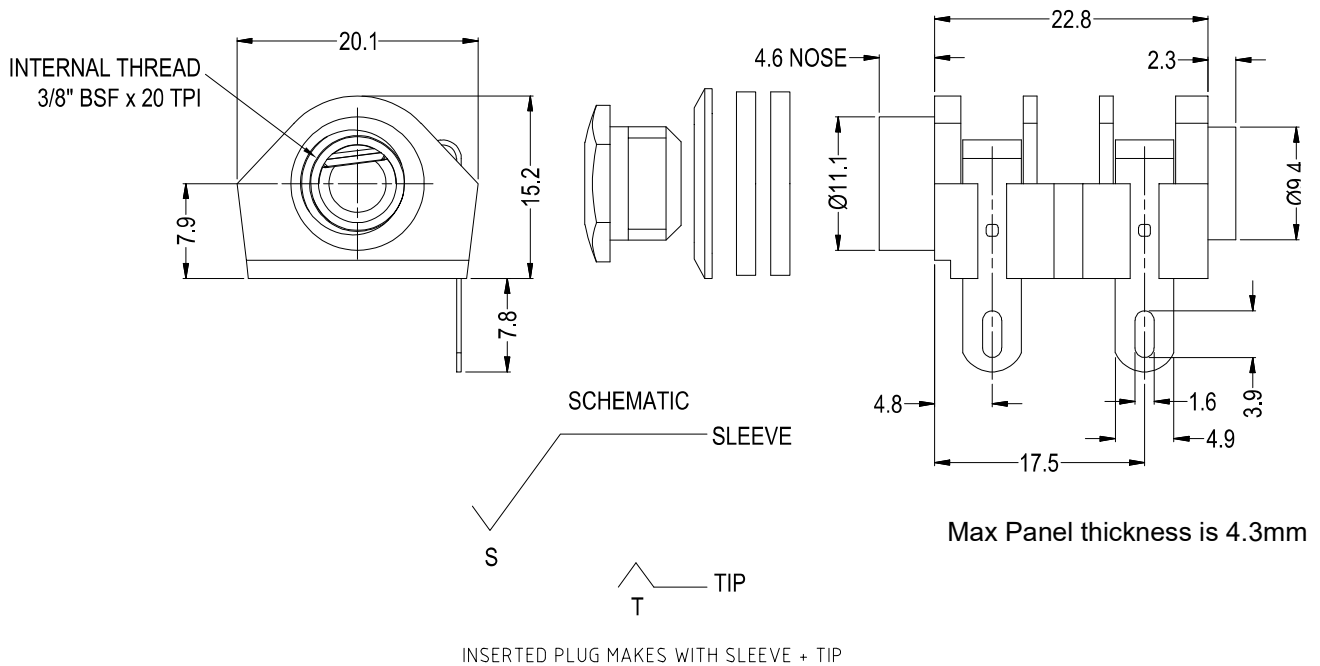

Max Panel thickness is 4.3mm

- CL1282A** - S4/SNS Mono Jack Socket, Solder Tag. Assembled.
- CL1282U** - S4/SNS Mono Jack Socket, Solder Tag. Unassembled.
- CL12821A** - S4/SNS Mono Jack Socket, Solder Tag. Gold plated. Assembled.
- CL12821** - S4/SNS Mono Jack Socket, Solder Tag. Gold plated. Unassembled.

### General Specification

Withstand voltage: 2000V DC minimum.  
Maximum current: 5 amps.  
Temperature rating: -10°C to +70°C.  
Life: Minimum 10,000+ operations.  
Nominal contact resistance: < 50mΩ.