
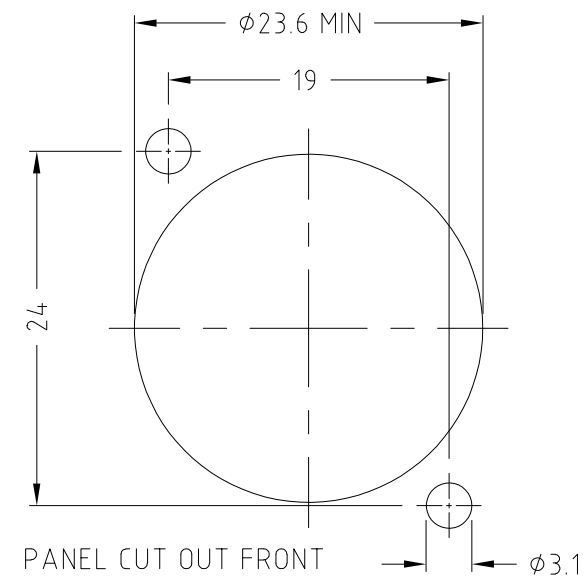
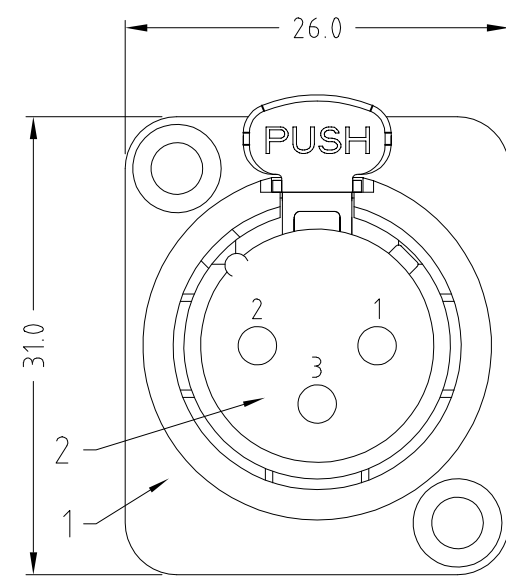
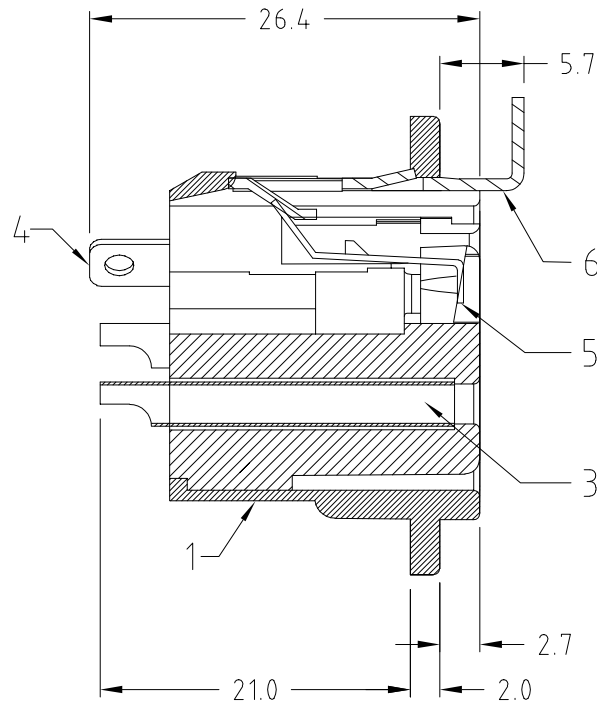


ISS.	AMEND	DATE
1	ISSUED	27/09/18
2	AMEND MATERIAL	16/11/18

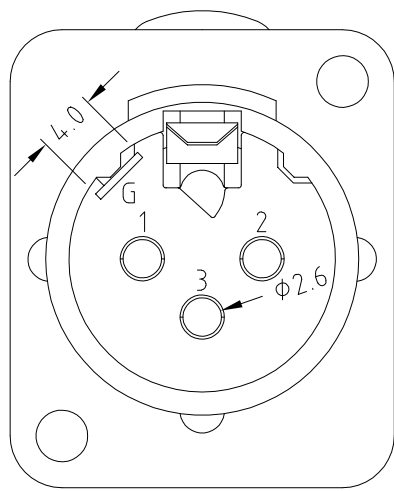

NOTE
Contact Resistance: $\leq 7m\Omega$
Insulation Resistance: $\geq 5000M\Omega$
Withstand Voltage: 1400V
Durability (Mating / Unmating): ≥ 2000
Insertion and Extraction Force: 10-80N

ITEM	DESCRIPTION	MATERIAL	FINISH
1	FRAME	ZINC ALLOY	BLACK NICKEL
2	INSERT	PBT	BLACK
3	CONTACT (3x)	BRASS	GOLD PLATE
4	GROUND	BRASS	SILVER PLATE
5	SPRING	SPRING STEEL	-
6	LATCH	SPRING STEEL	NICKEL PLATE

RoHS
COMPLIANT

TOLERANCE
NO DEC. PLACE $\pm$
1 DEC. PLACE $\pm$
2 DEC. PLACE $\pm$
HOLE $\varnothing$ $\pm$
ANGLES $\pm$
UNLESS
OTHERWISE STATED

Cliff Electronic Components Ltd.
76 Holmesthorpe Avenue, Holmesthorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 2018

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.			3rd ANGLE PROJECTION:	DO NOT SCALE
MATERIAL:	SEE TABLE	TITLE: XLR SKT FEMALE 3DCF/BM LATCH (BLACK)		
FINISH:	BLACK - SEE TABLE			
DRAWN:	T.J.O.	APPROVED:	D.P.J.	DRWG. No. FC61900 FORM: A4DRWGH