

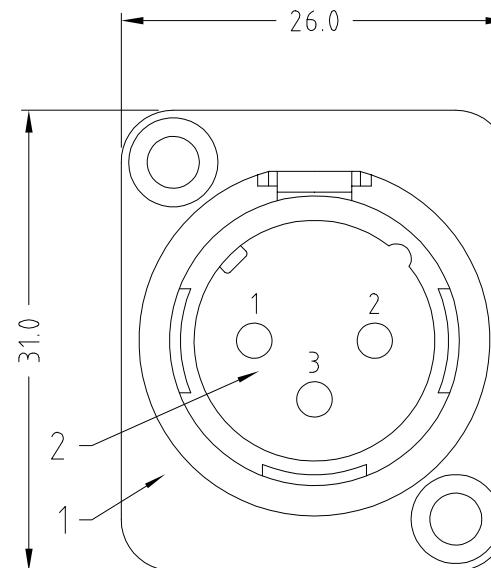


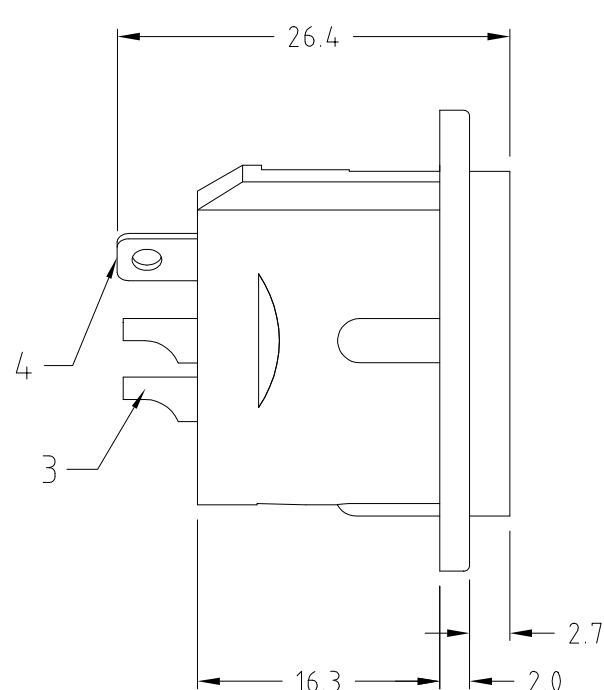

Contact Resistance: $\leq 7\text{m}\Omega$
Insulation Resistance: $\geq 5000\text{M}\Omega$
Withstand Voltage: 1400V
Durability (Mating / Unmating): ≥ 2000
Insertion and Extraction Force: $10\text{--}80\text{N}$

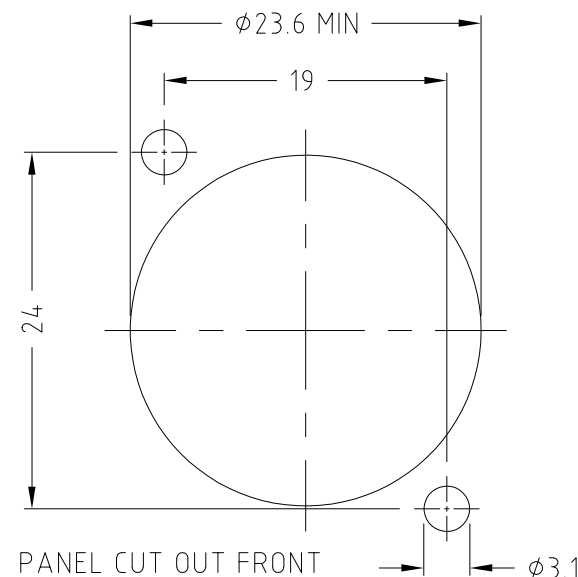

ITEM	DESCRIPTION	MATERIAL	FINISH
1	FRAME	ZINC ALLOY	NICKEL
2	INSERT	PBT	BLACK
3	CONTACT (3x)	BRASS	SILVER PLATE
4	GROUND	BRASS	SILVER PLATE

RoHS
✓ COMPLIANT

TOLERANCE
NO DEC. PLACE $\pm$
1 DEC. PLACE $\pm$
2 DEC. PLACE $\pm$
HOLE $\varnothing$ $\pm$
ANGLES $\pm$
UNLESS
OTHERWISE STATED

DO NOT SCALE

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION: 

MATERIAL:	SEE TABLE
-----------	-----------

FINISH: NICKEL - SEE TABLE

DRAWN: T.J.O.

APPROVED: D.P.J.

TITLE: XLR SKT MALE 3DCM/NM (NICKEL)

DRWG. No.	FC61905N
-----------	----------

FORM: A4DRWGH