


ISS.	AMEND	DATE
1	ISSUED	27/11/20

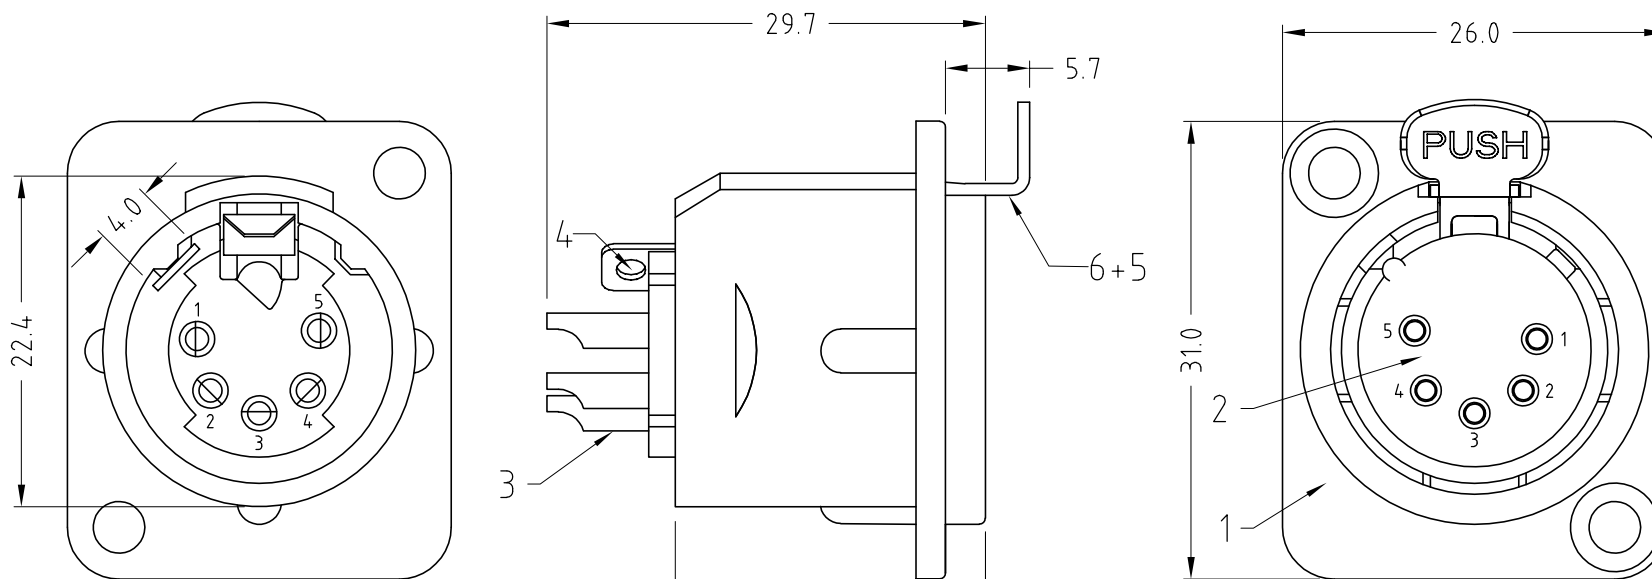

NOTE

Contact Resistance: $\leq 7m\Omega$


Insulation Resistance: $\geq 5000M\Omega$

Withstand Voltage: 1400V

Durability (Mating / Unmating): ≥ 2000

Insertion and Extraction Force: 10-80N

ITEM	DESCRIPTION	MATERIAL	FINISH
1	FRAME	ZINC ALLOY	BLACK NICKEL
2	INSERT	PBT	BLACK
3	CONTACT (5x)	BRASS	GOLD PLATE
4	GROUND	BRASS	SILVER PLATE
5	SPRING	SPRING STEEL	-
6	LATCH	SPRING STEEL	NICKEL PLATE

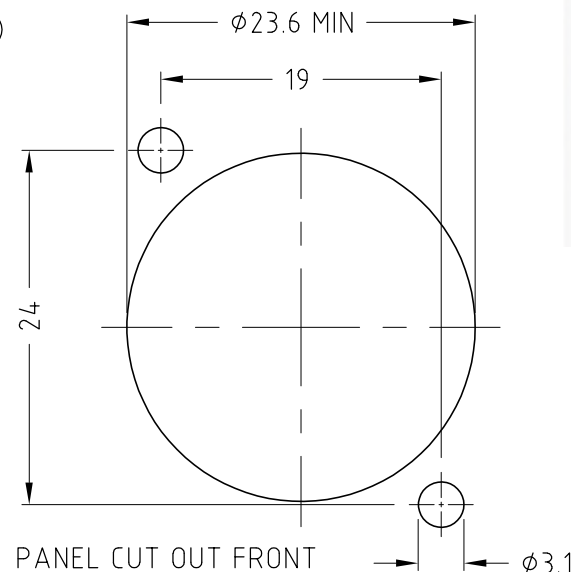

RoHS
COMPLIANT

TOLERANCE
NO DEC. PLACE $\pm$
1 DEC. PLACE $\pm$
2 DEC. PLACE $\pm$
HOLE $\varnothing$ $\pm$
ANGLES $\pm$
UNLESS
OTHERWISE STATED

Cliff Electronic Components Ltd.

76 Holmehorpe Avenue, Holmehorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION:



DO NOT SCALE

MATERIAL: SEE TABLE

FINISH: BLACK - SEE TABLE

DRAWN: T.J.O.

APPROVED: D.P.J.

TITLE: XLR SKT FEMALE 5DCF/BM LATCH (BLACK)

DRWG. No. **FC61950**

FORM: A4DRWG-F

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 2020